



## Hi-Tech Instruments, Inc.

Sugar Land, Texas, U.S.A.


voice: 281-980-9040

email: [info@writescreeen.us](mailto:info@writescreeen.us)

<http://www.writescreeen.us>

# LCD WriteScreen<sup>®</sup> Tablet Monitor

## Model: WriteScreenLPM150

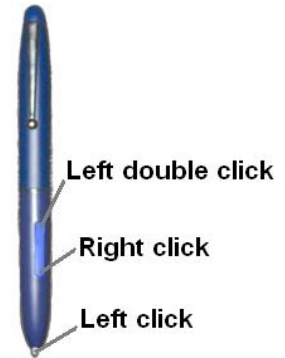

The WriteScreenLPM150 is a 15" color LCD monitor integrated with an electromagnetic tablet device. It features wider borders to comfort the writing and an adjustable stand to change the viewing angle for use at a podium, conference table or desk. It connects to your PC via USB and provides an additional electronic pen input device. This electronic pen works in conjunction with the tablet monitor



and can direct the mouse cursor displayed on the screen to move, to left-button click, to right-button click and to double left-button click by a single switch press. There are many applications, such as PowerPoint®, NetMeeting®, MSN Messenger®, Paint®, etc. that have "pen" features. You will find that the Hi-Tech WriteScreen® Tablet Monitor will be easy and enjoyable for use in those applications. For those applications that do not have a pen featured, the included Hi-Tech Annotation software can make it as if they had built-in pen features.

### Specification:

LCD	Active matrix TFT LCD
	15" diagonal screen size
	1024 x 768 addressable pixels
	0.297 x 0.297 mm pixel pitch
	280 cd/m <sup>2</sup> (typ.) brightness
	400:1 (typ.) contrast ratio
	Up/Down: 40°/60° viewing angle
	Left/Right 60°/60° viewing angle
	Lamp number: 2 CCFLs
	Life: 30,000hrs (typ.)
Active Display Area:	304 (H) x 228 (V) mm
Displayable Color:	16.7M
Horizontal Scan:	31.5 kHz to 60 kHz
Vertical Refresh:	56Hz to 75Hz
VESA modes:	VGA, SVGA, XGA
I/O Connector:	DC power in with AC adapter included
	VGA 15-pin D-sub (IN/OUT)
	USB connector
Power Consumption	30 watt (max.), < 3 watt (off mode)
Stand	Tilt (15° ~ 80°), can be set to portrait
Agency approval	UL,FCC,CE,TUV/R,MIC,BSMI,VCCI,CCC
Weight:	4.9kg (N/W), 7.6kg (G/W)
Dimension:	435(W) x 370(H) x 52(D) mm
	510 x 460 x 255 mm (packed)

**O.S.:** Windows Vista, XP, 2K, ME, 98

**Display:** Primary or 2<sup>nd</sup> Display at any orientation, portrait rotation

**Tablet:** RF tablet technology

Battery pen

Active area: 304 x 228mm

Resolution: 500 LPI

Accuracy: +/- 0.5mm

Pressure level: 512

Interface: USB

Report Rate: 125 reports/sec

Max Sense Height: 8mm

**Package:** Tablet LCD monitor with stand

VGA cable

USB cable

Power cord

AC-DC adapter

User's manual

CD1 (Tablet driver & App's)

CD2 (Hi-Tech Annotation)

Electronic Pen

Battery (AAA)